



# SPECIFICATION SHEET

## 390-EZSPC

### EZ-COOL® PHASE CHANGE ACTIVE FIT COOLING VEST WITH INSULATED COOLER BAG

- Polyester fabric
- V-neck with zipper closure and contoured design for a better fit while active
- Adjustable at shoulders and torso with hook and loop for snug less bulky fit
- To activate PCM, place cooling packs in fridge, freezer or in ice water for 45 minutes
- Cooling effects last for up to 3 hours
- Set includes 1 set of 4 cooling pack inserts with cooler bag
- TechKewl™ cooling packs are deployed in a variety of shapes and sizes for personal comfort and maximum cooling results

### APPLICATIONS

- Protection from stress of high temperatures outdoors and indoors
- Construction
- Automotive
- Mining
- Farming
- Medical/emergency services
- Food service
- Oil rigging
- Industrial sites
- Sporting events

### CARE INSTRUCTIONS

**Vest:** Machine wash, cool. Do not bleach, iron or dry clean. Hang dry.  
**Cooling Inserts:** Wipe outside with a damp cloth. Store flat.

### TECHNICAL DATA

MATERIAL	Cotton/Nylon
CONSTRUCTION	Main Fabric: Cotton Lining: Thermal Liner Cooling Inserts: Alkane Blend
COLOR	■ Blue
SIZES	Adjustable (See Chart)
PACKAGING	1 per polybag, 5 bags per case
CASE	16" x 16" x 16" / 40.6cm x 40.6cm x 40.6cm
CASE WEIGHT	33 lbs / 15 kg
VEST WEIGHT	5 lbs / 2.3 kg
INSERTS WEIGHT	1 lb / 0.45 kg
COO	China / USA


### BARCODES

ITEM	BAG	DOZEN	CASE
■ 390-EZSPC-M/L	616314170713	01616314170712	02616314170711
■ 390-EZSPC-L/XL	616314170720	01616314170729	02616314170728
■ 390-EZSPC-2X/3X	616314170737	01616314170736	02616314170735



### SIZE RECOMMENDATIONS (lbs)

M/L	L/XL	2X/3X
100-175 lbs	175-250 lbs	250-300 lbs

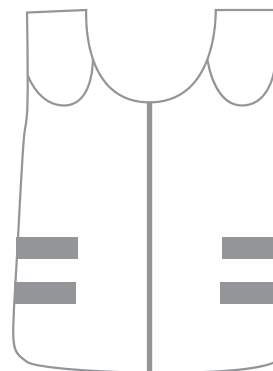

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.