



SPECIFICATION SHEET

396-602-BULK

EZ-COOL® EVAPORATIVE COOLING TOWEL - BULK PACK

When activated simply in a small amount of water, the amazing fabric feels cooler than the ambient temperature and will remain cool for hours. You may cut the towel size and wrap around your head, neck, wrists or use under a ventilated cap. If it dries out just add water, give it a quick wring and it's ready to continue cooling.

- Advanced Poly Vinyl Alcohol (PVA) material absorbs water and sweat efficiently and remains active for hours
- Natural evaporation provides a cooling sensation delivering comfort in warm environments
- Rinse the EZ-COOL® towel prior to use and wrap around neck, head, or wipe down other pulse points for an exceptional cooling effect
- Designed to be used over and over again; when it begins to dry out, simply rinse again
- Cooling properties can be reactivated for the life of the product; May be used over and over again
- If unopened the PVA cooling towel has an unlimited shelf life and is reusable once opened if cared for properly

APPLICATIONS

Ideal for use in hot environments for protection from the stress of high temperatures.

CARE INSTRUCTIONS

Rinse well before first use. To store, place damp towel back in the storage container. Gentle machine wash with mild soap.

TECHNICAL DATA

MATERIAL	100% Polyvinyl Alcohol
CONSTRUCTION	100% Polyvinyl Alcohol
COLOR	Blue
SIZES	One Size
PACKAGING	1 per bag, 10 per inner pack, 80 per case
CASE DIMENSIONS	18.1" x 14.6" x 12.2" / 46cm x 37cm x 31cm
CASE WEIGHT	28.7 lbs / 13 kg
COO	China


BARCODES

ITEM	BAG	INNER PACK	CASE
396-602-B-BULK	616314265907	01616314265906	02616314265905



DIMENSIONS (in/cm)

	ONE SIZE
A	31 / 80
B	13 / 34

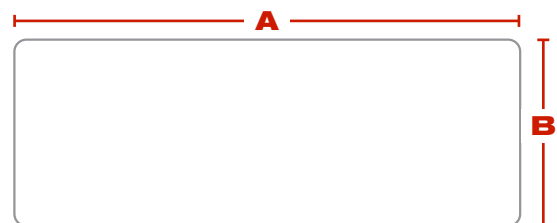

*Packed individually in inner packs of 10 and 80 per case

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.