


# 4' LED Grow Tube

15W | 120-277VAC | Ordering 54206161 | Part GL-15-MV

- > Accelerate plant growth for higher yields
- > Use wall switch to change between Full Spectrum White and Dual Band Spectrum modes



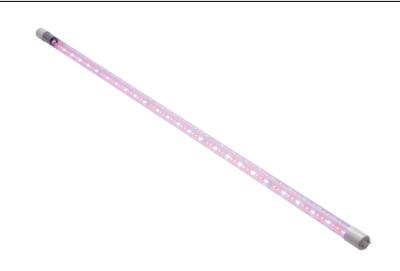

### **SPECIFICATIONS**

 Ordering
 54206161

 Part
 GL-15-MV

 Certification
 54206161

**Description** 4' LED Grow Tube

Input Voltage (VAC) 120-277V Wattage 15W

Average Rated Life<sup>1</sup> 50,000 hours Typical PPF 26  $\mu$ mol/s

Location Rating UL Damp Location

Beam Angle ≥100

Operating Temperature Min -13°F (-25°C),

Max 113°F (45°C) >0.9


Power Factor >0.9
Operating Frequency (Hz) 50/60Hz

Spectrum White and Dual Band Spectrum

#### Full Spectrum White

### 1.2 1.0 0.8 0.6 0.4 0.2 0.0 380 480 580 680 780

#### **Dual Band Spectrum**





## TO ORDER:

www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754









# 4' LED Grow Tube

15W | 120-277VAC | Ordering 54206161 | Part GL-15-MV

## SHIPPING INFORMATION

 Ordering
 54206161

 Part
 GL-15-MV

 Certification
 54206161

 UPC
 849489060088

 $47^{3}/_{4} \times 1$ Product Dimensions (L x W x H in.) 120 x 2 <sup>1</sup>/<sub>2</sub> Product Dimensions (L x W x H cm.) Product Weight (lbs.) 0.5lbs N/A **Inner Carton Quantity** N/A **Inner Carton Bar Code** Inner Carton Dimensions (L x W x H in.) N/A Inner Carton Dimensions (L x W x H cm.) N/A N/A Inner Carton Weight (lbs) **Master Carton Quantity** 10pcs

Master Carton Weight (lbs) 8.9lbs
Pallet Quantity N/A

Brought to you by:



TO ORDER:

www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

ETi Solid State Lighting, Inc. 720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256