



# SPECIFICATION SHEET

## 906-2080NOL7

### FIRE RESISTANT HOOD

- Meets or exceeds the standards of NFPA 1971
- Highest quality knitted “sock” style hoods that provide protection from flash fire hazards with added 2-ply construction for thermal insulation in cold weather conditions
- Nomex® protective barrier carbonizes and thickens when exposed to the intense heat of today’s fires. This increases the protective barrier to minimize burn injury. Stays supple and flexible till it’s cool, which gives you valuable extra seconds of protection when needed most
- Garments made of Nomex® are also durable, lasting on average two to three times longer than other standard protective fabrics
- Lenzing FR® is a specialty viscose fiber, is flame resistant, and naturally derived from wood. It offers heat and flame protection and it’s unique thermal properties combined with permanent flame resistance makes it a “Heat Protection Fiber”.
- This fabric combination provides comfort and breathability
- The most cost effective solution to your NFPA requirements

### APPLICATIONS

- Firefighting
- Chemical plants

### TECHNICAL DATA

MATERIAL	20% Nomex® and 80% Lenzing FR®
COLOR	<input type="checkbox"/> White
TPP RATING	17
CUT	Tri-Cut
COVERAGE	Full Face
LAYER	Single w/ Bib
SIZES	OSFM
PACKAGING	12 hoods per case
CASE	10" x 6" x 12" / 25.4cm x 15.2cm x 30.5cm
CASE WEIGHT	1.4 kg
COO	USA


### BARCODES

ITEM	EACH	CASE
<input type="checkbox"/> 906-2080NOL7	616314148019	02616314148017



### DIMENSIONS (in/cm)

	OSFM					
<b>A</b>	13 / 33					
<b>B</b>	9 / 22.9					
<b>C</b>	6 / 15.2					
<b>D</b>	9.5 / 24.1					
<b>E</b>	4.5 / 11.4					
<b>F</b>	12.5 / 31.8					
<b>G</b>	16 / 40.6					
<b>H</b>	14.25 / 36.2					

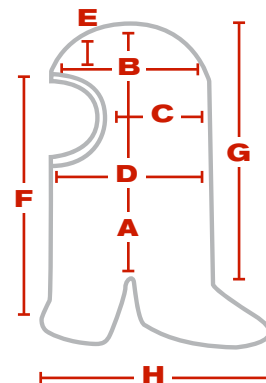

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.