



SPECIFICATION SHEET

9100-21731



25 CAL/CM² - FLAME RESISTANT OVERALLS

- ARC Rating: ATPV 25 cal/cm²
- PPE 3 (HRC 3)
- Aramid high tenacity thread
- Bar-tacked at all stress points
- No metal pieces on garment
- Hook and loop adjustment at sides and bottom ankle cuffs
- Pass through pockets
- Covered zipper fly closure
- Elasticized waist

STANDARDS MET

- NFPA 70E-2012
- ASTM F1506-10a
- ASTM F2178-12
- OSHA 29 CFR 1910.269

APPLICATIONS

- Electrical & Utilities

CARE INSTRUCTIONS

Machine wash warm, 165° F max. Tumble dry low. DO NOT bleach. DO NOT use fabric softener. DO NOT iron.

TECHNICAL DATA

MATERIAL	Westex Ultrasoft 88% Cotton 12% High Tenacity Nylon
CONSTRUCTION	Two Layers; 7 oz FR Cotton over 7 oz FR Cotton
COLOR	■ Navy
SIZES	S - 5X
PACKAGING	1/polybag
CASE SIZE	12" x 12" x 6" / 30.5cm x 30.5cm x 15.25cm
CASE WEIGHT	4 lbs / 1.8 kg
COO	USA


BARCODES

ITEM	BAG	BOX	CASE
■ 9100-21731/S			
■ 9100-21731/M			
■ 9100-21731/L			
■ 9100-21731/XL			
■ 9100-21731/2X			
■ 9100-21731/3X			
■ 9100-21731/4X			
■ 9100-21731/5X			



DIMENSIONS (in)

	M	L	XL	2X
A	36-38	40-42	44-46	48-50
B	32	32	32	32

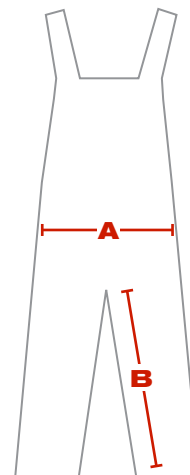

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.