



SPECIFICATION SHEET

9100-52772



25 cal/cm² ARC/FR TWILL COVERALL

- Arc Rating: ATPV 26.8 cal/cm²
- PPE 3 (HRC 3)
- Aramid high tenacity thread
- Bartacked at all stress points
- Protective stand up collar
- Storm guard with front hook and loop closure
- Side elasticized waist
- Aramid rib knit cuffs
- 2 waist side access pockets

STANDARDS MET

- NFPA 70E 2012
- ASTM F1506
- OSHA 29 CFR 1910

APPLICATIONS

- Electrical & Utilities
- Petrochemical
- Mining
- Gas
- Oil
- Military
- Welding
- Emergency Services

CARE INSTRUCTIONS

Machine wash warm, 165° F max. Tumble dry low. DO NOT bleach. DO NOT use fabric softener. DO NOT iron.

TECHNICAL DATA

MATERIAL	88% Cotton / 12% Nylon
CONSTRUCTION	Two layers, 7oz over 7 oz Westex Ultra Soft®
COLOR	■ Navy
SIZES	S - 5X
PACKAGING	10 per case
CASE WEIGHT	2lbs per unit
COO	USA


BARCODES

ITEM	EACH	BOX	CASE
■ 9100-52772/S	616314136719	01616314136718	02616314136717
■ 9100-52772/M	616314136702	01616314136701	02616314136700
■ 9100-52772/L	616314136696	01616314136695	02616314136694
■ 9100-52772/XL	616314136726	01616314136725	02616314136724
■ 9100-52772/2X	616314136641	01616314136640	02616314136649
■ 9100-52772/3X	616314136655	01616314136657	02616314136656
■ 9100-52772/4X	616314136665	01616314136664	02616314136663
■ 9100-52772/5X	616314136672	01616314136671	02616314136670
■ 9100-52772/6X	616314136726	01616314136725	02616314136724



DIMENSIONS (in)

	S	M	L	XL	2X	3X	4X	5X
A	36-38	40-42	44-46	48-50	52-54	56-58	60-62	64-66
B	32-34	36-38	40-42	44-46	48-50	52-54	56-58	60-62
C	34.5	35.5	36.5	38	39.5	41	42.5	44
D	32	32	32	32	32	32	32	32

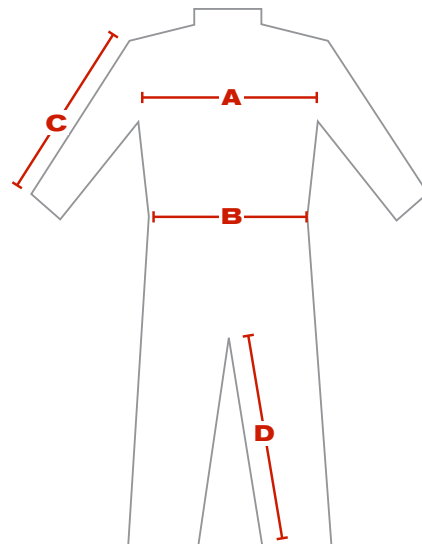

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.