

**Vaportight LED Strip**  
EVSL Series, 4-Foot Strip

Project:	
Catalog#:	
Approved by:	


**Features**

- Polycarbonate lens and housing provide durability under demanding environments
- Color Rendering Index (CRI): > 80
- Color Options: 4000K, 5000K CCT
- High efficacy >130 LPW
- Long LED life; L<sub>70</sub> > 120,000 hours\*
- Rated for Ambient Temperatures between -30°C/-22°F to 50°C/122°F
- Power Factor (PF) > 0.9
- Total Harmonic Distortion (THD) < 20%
- Input Voltage: MV: 120 – 277V; 50/60 Hz
- Dimmable: 0-10Vdc
- UL/cUL Listed – suitable for wet locations
- IP65
- Warranty: 5 years

\*L<sub>70</sub> hours are IES TM-21-11 calculated hours.

**Applications**

- Parking Garage
- Eaves
- Warehouses
- Canopies
- Walkways
- Stairwells
- Utility Lighting
- Low Bay
- Industrial/commercial

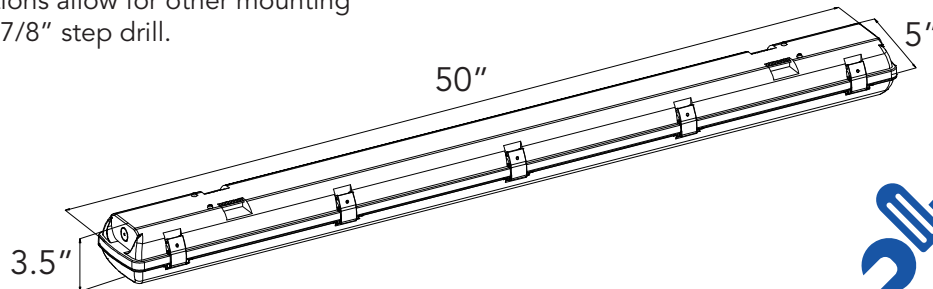

**Mounting Options**

- V-Hooks included
- Surface Mounting hardware included
- Multiple drill locations allow for other mounting options. Requires 7/8" step drill.

**Dimensions**



Installation Instructions



Zip File

Ordering Information				Remarks	
Example: EVSL44040MV					
Model Series	Configuration	Input Voltage	Factory Installed Options	Dimmable	Be careful with chemical exposure. Please consider our <b>VSL4</b> series, for swimming pool, car wash, or other outdoor applications with prolonged moisture/UV exposure.
<b>EVSL4</b> 4-Foot, LED Vaportight Strip	<b>4040:</b> 40W, 4000K, 5200 Lm	<b>MV</b> 120-277V, 50/60 Hz	<b>(Blank):</b> Plastic Latches <b>S:</b> Stainless Steel Latches	YES	
	<b>6540:</b> 65W, 4000K, 8450 Lm			0-10VDC	
	<b>6550:</b> 65W, 5000K, 8500 Lm				

**Accessories** (Field Installed Options)

Model	Description
<b>EVSL4-FR-LENS</b>	Replacement frosted polycarbonate lens for EVSL4 series fixtures.
<b>EVSL4/PC-LATCH</b>	Replacement Polycarbonate Latches (10 latches per bag)
<b>EVSL4/MT-LATCH</b>	Replacement Stainless Steel Latches (10 latches per bag)
<b>HL-BLEDEM-CP-800</b>	800 lumen Emergency Battery Backup
<b>HL-BLEDEM-CP-1200</b>	1200 lumen Emergency Battery Backup
<b>HL-BLEDEM-CP-1600</b>	1600 lumen Emergency Battery Backup
<b>LCPCMV</b>	External Mount Photocell, 120-277VAC; Swivel and Side Lens

