
Specification Sheet

9/5/2013

F54T5/850/HO



				Pro	oject:		
T5 Linear Fluorescent Lamp 54 Watt / 85 CRI / 5000K HIGH OUTPUT				Catalog#:			
				Approved by:			
			Ordering Information				
	_		Howard Catalog Number (Ordering Code)		F54T5/850/HO		
	Ŧ		UPC Code	02784			
			Description		T5 High Output Linear Fluorescent		
			Package Quantity		25		
			Physical Characteristics				
			Base		Mini Bipin (G5)		
		С	Bulb Type			T5 (5/8 inch)	
A	В		Bulb Description		Tubular Fluorescent Lamp		
			Nominal Length		46		
			Base face to base face (Amax) (in)		45.24		
			Base face to end of opposite base pin		45.42/45.52		
			(Bmin/Bmax) (in)				
			End of base pin to end of the opposite pin		45.79		
	\downarrow		end (C) (in)				
•••			Operating Characteristics				
			Nominal Wattage		54		
			Approximate Initial Lumen (Im)		5000		
ŀ			Approximate Mean Lumen (Im)		4950		
ŀ			Average Rated Life (hours)		30000		
ŀ			Color Temperature (K)		5000		
			Color Rendering Index (CRI)	Color Rendering Index (CRI) 85			

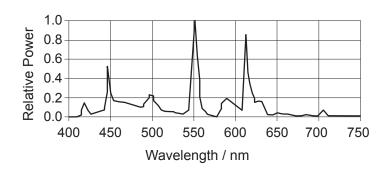



Note: Rated lamp life is 30,000 hours based on 3 hours per start. Lamp life will be affected when using occupancy sensors, dimmers, or dimming systems. These products are low-mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may vary; check local and state regulations.

Specifications subject to change without notice.

Howard Lighting Products | 580 Eastview Drive | Laurel, MS 39443 (toll free) 800.956.3456 | (direct) 601.422.0033 | (fax) 601.422.1652 www.HowardLightingProducts.com