

LED SignLight

S11, S14 & A19



A Sure Sign of Savings and Reliability.

The leader in sign lighting introduces the most efficient replacement for incandescent sign bulbs yet. LITETRONICS LED SignLight™ light bulbs are UL Wet Location rated for indoor or outdoor use. LED technology means both a long life and a savings of more than 90% versus incandescent. The S11's unique design looks so identical to an incandescent, you'd never even know it was LED. Only LED SignLight™ is professionally flash tested through a rigorous process – being flashed over 1 million times – to ensure they offer the same long-lasting, reliable performance, you've come to expect from LITETRONICS.

Benefits

- Flashable
- 25,000-50,000 hour life
- Over 90% energy savings compared to incandescent
- UL Wet for indoor/outdoor use
- Instant-On™, Instant-Bright™
- RoHs Compliant; Mercury and Lead-Free
- Reduces replacement and maintenance costs
- 3-year warranty

Markets & Applications

- Casinos
- Marquees
- Signs

Comparison Chart

LED	=	INCANDESCENT
1-watt	=	11-15 watts
1.5-watts	=	15-watts
2.5-watts	=	25-watts

LITETRONICS®

6969 W. 73rd St.
Bedford Park, IL 60638
www.Litetronics.com

LED SignLight

S11, S14 & A19

Technical Product Information


Voltage: 120V

Line Frequency: 60Hz

CRI: 83

Power Factor: ≥0.9

Operating Temp: -5° to 110°F

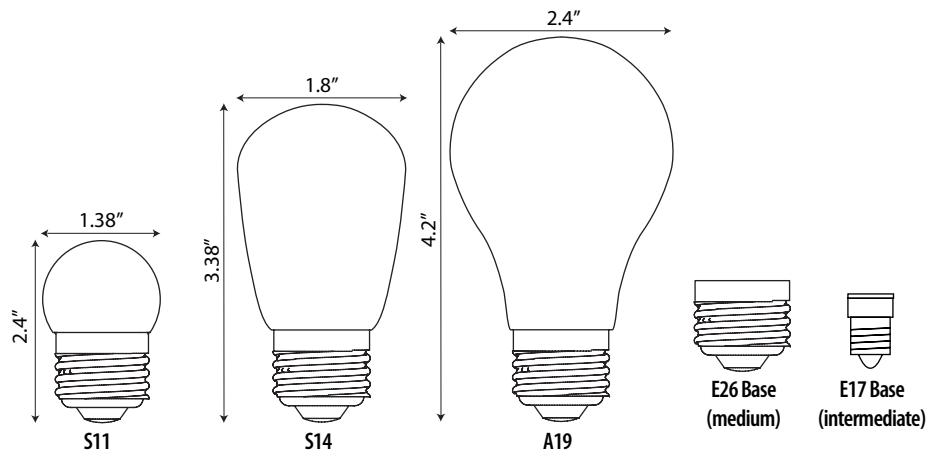

Product Specifications

SHAPE	WATTS	BASE	DESCRIPTION	ORDERING CODE	CCT (K)	SIGNLIGHT LUMENS	RATED LIFE	CASE QUANTITY	FINISH
S11	1	INT	1W S11 INT 120V CL 2700K 25,000H	LD01312CL2	2700	50	25,000H	25	CLEAR
	1	INT	1W S11 INT 120V WH 2700K 25,000H	LD01312WH2	2700	50	25,000H	25	WHITE
	1	INT	1W S11 INT 120V CR 25,000H	LD01312CR	-	-	25,000H	25	RED
	1	MED	1W S11 MED 120V CR 25,000H	LD01512CR	-	-	25,000H	25	RED
	1	INT	1W S11 INT 120V CY 25,000H	LD01312CY	-	-	25,000H	25	YELLOW
	1	MED	1W S11 MED 120V CY 25,000H	LD01512CY	-	-	25,000H	25	YELLOW
	1	INT	1W S11 INT 120V CB 25,000H	LD01312CB	-	-	25,000H	25	BLUE
S14	1.5	MED	1.5W S14 MED 120V WH 2700K 25,000H	LD1E514WH2	2700	85	25,000H	25	WHITE
	1.5	MED	1.5W S14 MED 120V CR 25,000H	LD1E514CR	-	-	25,000H	25	RED
	1.5	MED	1.5W S14 MED 120V CY 25,000H	LD1E514CY	-	-	25,000H	25	YELLOW
	1.5	MED	1.5W S14 MED 120V CB 25,000H	LD1E514CB	-	-	25,000H	25	BLUE
A19	1.5	MED	1.5W A19 MED 120V CL 2700K 25,000H	LD1E518CL2-1	2700	90	25,000H	10	CLEAR
	2.5	MED	2.5W A19 MED 120V FR 2700K 50,000H	LD2E518FR2	2700	150	50,000H	10	FROST

