UPGRADE YOUR LOADING DOCK

THE SAFETY SOURCE OFFERS HIGH-QUALITY DOCK EQUIPMENT DESIGNED TO ENHANCE SAFETY, EFFICIENCY, AND DURABILITY IN YOUR FACILITY.




















WHY CHOOSE THE SAFETY SOURCE?

- TURNKEY INSTALLATIONS
- OSHA-COMPLIANT DOCK SAFETY SOLUTIONS
- **✓ NATIONWIDE SERVICE & SUPPORT**
- FREE LOADING DOCK SAFETY AUDITS
- CUSTOM SOLUTIONS FOR ANY INDUSTRY



WWW.SAFETYSOURCELLC.COM 866.688.7233 | SALES@SAFETYSOURCELLC.COM

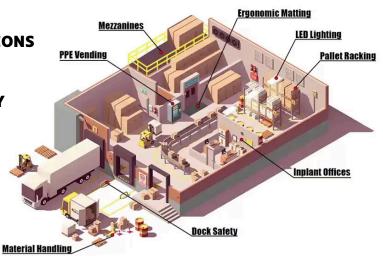

Dock Door

Panels: 3" thick, UV Inhibited, Weather Resistant PVC

Insulation: Closed Cell Polyurethane R-22 Door sizes: Up to 10' Wide X 12' High

Door Reset: Self Correcting – Resets by opening and

closing the door

Brush Seals: Nylon Header Side Brush Seals: Polypropylene

End Cap: Injection molded plastic

Track: PVC

Knockout Capability: Full – top to bottom, inside or out

Lock: Optional – Offers intruder security Door Styles: Available in true vertical and tilt back

configurations

Torsion Springs

Spring Cycle: 25 K (Standard)

Door Cables: 5/32" - 7 x 19 galvanized steel

Shaft: 1" keyed hollow shaft

Bearings: 1" UCF Precision Flange Bearing

Counterweight

Counterweights: Round bar stock

Door Cables: 5/32" - 7 x 19 galvanized steel

Pulley Brackets: 12-gauge steel box construction with guides

Pulley: 6" Delrin with needle roller bearings **Counterweight Cables:** 3/16" – 7"x19" galvanized steel

includes Cable Cop and safety cog

Shaft: 1" keyed hollow shaft

Bearings: 1" UCF Precision flange bearing



Vision Panel -

is insulated and offers the added safety of visible verification of truck activity.

protects the base of the track in an area prone to collision damage.

K-Guard Track **Protector**

Check out our other dock doors









www.safetysourcellc.com 866-688-7233 sales@safetysourcellc.com