
## MINI LED WALLPACK MINILWPP INSTALLATION INSTRUCTIONS

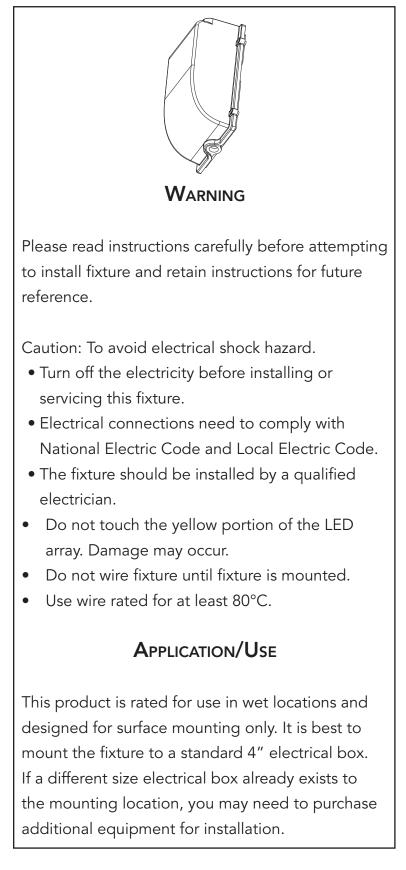

## **NSTALLATION**

- 1. Loosen screws securing lens/fixture cover and remove.
- 2. Loosen reflector screw and remove reflector.
- Knock out appropriate holes on back plate for mounting on wall over electrical box.
  For surface entrance, knock out the hole over conduit entrance on the bottom of fixture.
- 4. Remove paper backing from gasket and adhere over opening on back of housing
- Caulk between fixture back and mounting surface to prevent water ingress.
  A high-grade caulking compound, such as silicon rubber, should be used.
- Securely attach the fixture to the conduit or to the junction box. Secure fixture to mounting surface with appropriate hardware.
- 7. See "Fixture Wiring"
- 8. Re-install reflector and lens cover. Tighten screws which were loosened in Steps 1 and 2.

## FIXTURE WIRING

- Connect the black fixture lead to the voltage supply lead with wire connector.
- 2. Connect the white fixture lead to the neutral supply lead with the wire connector.
- 3. Connect the green or green/yellow or bare copper ground lead to the supply ground lead with the wire connector.
- 4. Cap and insulate all unused leads.

Need help? Call 1-800.956.3456 to speak with our installation and product experts.

