
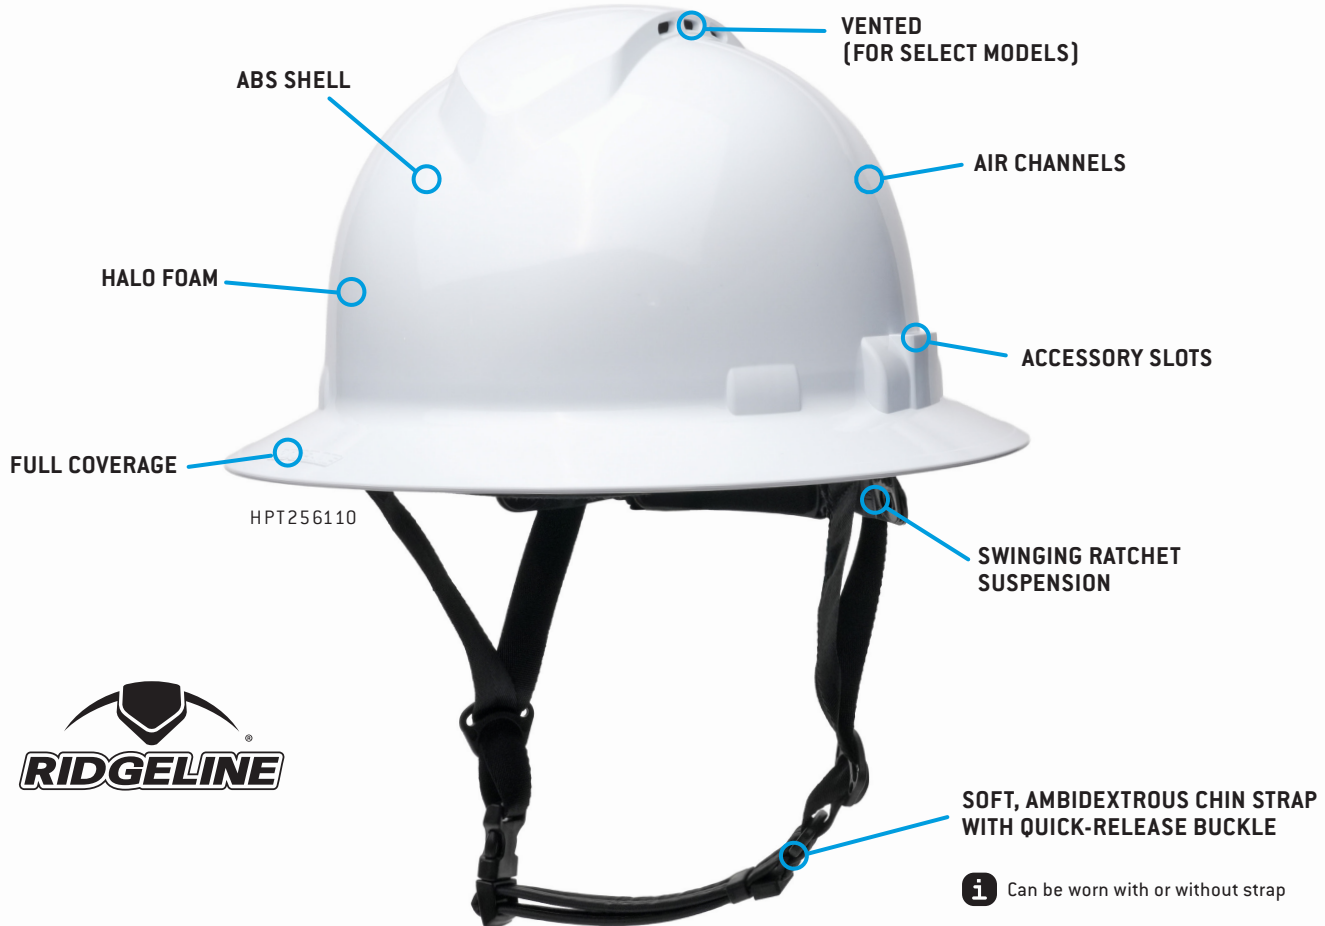


RIDGELINE® T2 FULL BRIM

UNRIVALED STYLE, ELEVATED PERFORMANCE

Discover the Ridgeline® T2 Full Brim Hard Hat, offering superior protection against both top and side impacts. With a lightweight ABS shell and full brim design, it delivers maximum safety. The hard hat features EPS halo-style foam which creates channels to enhance airflow, keeping the wearer cooler while still absorbing impacts. A customizable swinging suspension ensures a comfortable and secure fit. Available with and without Mips® brain protection system for industrial safety helmets.



FEATURES

Cooling Impact Design: Unique EPS halo foam design creates channels that enhance airflow, keeping the helmet cooler while ensuring reliable impact absorption for a more comfortable and protective fit

Robust, Lightweight Shell: ABS shell ensures durable, lightweight protection

Complete Cover: Full brim design ensures maximum protection from environmental hazards while enhancing comfort and visibility

Customizable Fit: 6-point swinging suspension with ratchet adjustment allows easy adjustments for a secure, personalized fit

Enhanced Ventilation (For Select Models): Strategically placed vents improve airflow and reduce heat buildup, providing cooler wear during extended use

Accessory Compatibility: Universal accessory slots to add additional protection

Engineered Toughness: Meets ANSI/ISEA Z89.1-2014 Type II, certified for CAN/CSA Z94.1-2015 Type II to ensure durability and confidence in performance



LEARN MORE
ABOUT THE RIDGELINE T2'S
KEY FEATURES



Mips® safety system is a technology in helmets designed to provide added safety in many accidents.

RIDGELINE® T2 FULL BRIM

UNRIVALED STYLE, ELEVATED PERFORMANCE



ABS PLASTIC



ACCESSORY
COMPATIBLE



COMFORTABLE
PADDING



RATCHETING
SUSPENSION



VENTED
OPTIONS

VARIATIONS

NON-VENTED

6-Point Ratchet | 11 Variations

	HPT256110	White
	HPT256111	Black
	HPT256113	Slate Gray
	HPT256116	White Graphite Pattern
	HPT256117	Black Graphite Pattern
	HPT256120	Red
	HPT256130	Yellow
	HPT256131	Hi-Vis Lime
	HPT256135	Green
	HPT256141	Hi-Vis Orange
	HPT256160	Blue

VENTED

6-Point Ratchet | 11 Variations

	HPT256110V	White
	HPT256111V	Black
	HPT256113V	Slate Gray
	HPT256116V	White Graphite Pattern
	HPT256117V	Black Graphite Pattern
	HPT256120V	Red
	HPT256130V	Yellow
	HPT256131V	Hi-Vis Lime
	HPT256135V	Green
	HPT256141V	Hi-Vis Orange
	HPT256160V	Blue

REPLACEMENT PARTS



HPRBANDR
Ridgeline Cap Style and Full Brim
Hard Hat Sweat Suspension



HPT2STRAP
Ridgeline T2 Full Brim
Replacement Chin Strap

HPT2R561
Ridgeline T2 Full Brim
Replacement Suspension

HPT2R561M
Ridgeline T2 Full Brim
Replacement Suspension
with Mips

Mips® NON-VENTED

Mips

6-Point Ratchet | 3 Variations

	HPT256110M	White
	HPT256116M	White Graphite Pattern
	HPT256117M	Black Graphite Pattern

Mips® VENTED

Mips

6-Point Ratchet | 3 Variations

	HPT256110VM	White
	HPT256116VM	White Graphite Pattern
	HPT256117VM	Black Graphite Pattern

HPT2RBANDM
Ridgeline T2 Full Brim Replacement
Sweatband for Mips Suspension



i 6-point suspension can be converted to 4-point.

MATERIALS

Shell: ABS [Acrylonitrile Butadiene Styrene] Plastic
Foam: EPS [Expanded Polystyrene]
Sweatband: Polyester Blend
Crown Pad: LDPE [Low Density Polyethylene]
Back Cushion: EVA [Ethylene Vinyl Acetate]
Chin Strap Upper: Terylene
Chin Strap Under: PU [Polyurethane] + Cotton Blend
Buckle: POM [Polyoxymethylene]
Suspension: HDPE [Polypropylene] + High Impact Nylon

⚠ WARNING: Cancer and Reproductive Harm —P65Warnings.ca.gov

MARKINGS

Standard: ANSI/ISEA Z89.1-2014 + CAN/CSA Z94.1-2015
Type: Type II Full Brim Hard Hat
Class: Non-Vented — Class E [Electrical] Rated for 20,000 Volts, Vented — Class C [Conductive] Does Not Offer Electrical Protection
LT: Low Temperatures Protection up to -22°F HT: High Temperatures Protection up to 140°F
HV: Meets All Requirements for High Visibility (HPT256131, HPT256141, HPT256131V, HPT256141V)
Date Code: Indicates Month and Year Shell was Molded - Does Not Indicate Service Life.

Product markings may vary // Updated as of 10.25

GENERAL SPECIFICATIONS

Weight: 556 gm
Shell Thickness: 1.7-3.2 mm
Dimensions: 32.8 x 28.6 x 15.7 cm
Suspension Adjust Sizing: 6.5 to 8
Suspension: Adjustable with Ratcheting Wheel

PRODUCT GUIDELINES

Never alter or modify the shell, suspension system, or chin strap. Always use original replacement parts. Decals/stickers are acceptable if they do not affect a hard hat's protective rating or make it difficult to find damage.

Inspect your hard hat shell, suspension, and chin strap on a regular basis. Check for cracks or faulty parts each time it is to be used. If you notice any sign of damage, the faulty part should be discarded and immediately replaced.

The service life of a hard hat begins when the hard hat is put into service. Maximum service life is 5 years for the shell and 1 year for the suspension, beginning immediately upon first use. If the hard hat has received a considerable strike, it should be replaced immediately, even if there is no visible damage.

Clean only with mild soap and lukewarm water. DO NOT USE paints, chemicals, gasoline or similar substances on the hard hat. If these substances are applied on the shell, its impact resistance and other features could be decreased and could be dangerous for the user.

Store hard hat in a cool place out of direct sunlight. Do not store in vehicles where the interior temperature can become extreme and cause deterioration of the hard hat.

PYRAMEX®

P 800.736.8673 // F 901.861.4967 // W PYRAMEX.COM