



**MCR
SAFETY**

MG3211A

Cut Protection Specification Sheet

PRODUCT DESCRIPTION:

Alycore™ is one of the most cut and puncture resistant materials available. Our Alycore™ gloves offer maximum dexterity and sense of touch due to the high degree of flexibility and patent pending construction. All Alycore™ styles provide cut performance levels, which exceed ANSI and CE cut level 5 ratings. From wranglin' to buildin', these gloves are tough for the job! Cowhide is the most commonly used leather due to availability. Characteristics include a good balance between abrasion resistance, dexterity, durability and comfort. The MG3211A drivers gloves feature; unlined select cow grain leather, shirred elastic back, cotton hemmed, a keystone thumb pattern, and Alycore™ in the palm and fingers (see protection zones).



FEATURES:

- Made with Alycore™ Providing Cut and Puncture Resistance in Palm
- ANSI/ISEA A9 and CE level 5 Cut Scores
- Select Grade Grain Cowhide
- Keystone Thumb
- Launderable - Machine Wash, Do NOT machine dry

APPLICATIONS:

Cable , Construction, Demolition, Forestry, Lumber industry, Plywood industry, Rebar

TECHNICAL DATA FOR: MG3211A

Material Group	Leather	EN 388 : CE Score - Tear	3
Product Type	Cut Protection	ANSI Cut	ANSI Cut A9
Glove Size	Large		
Material	Leather		
Leather Cut	Grain		
Leather Type	Cow Skin		
Grade	Select Grade		
Features	Sold by pair		
Lining	Unlined		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2019 MCR Safety - All Rights Reserved




MCR
SAFETY

MG3211A

Cut Protection Specification Sheet

Pattern Gunn
Thumb Style Keystone
Thickness 0.9 - 1.5 mm

Made In China

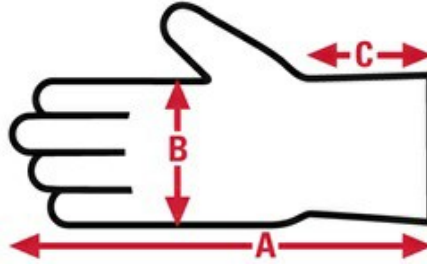

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
MG3211AL	Large	10.000	5.000	0.000	43.776 lb.	0.608
MG3211AM	Medium	9.875	4.875	0.000	41.616 lb.	0.578
MG3211AXXL	XX - Large	10.750	5.625	0.000	46.008 lb.	0.639
MG3211AXL	X - Large	10.750	5.250	0.000	47.808 lb.	0.664