

TECHNICAL DATA

Weight	23.64 gm
Lens Base Curve	8 Curve
Lens Size	83.5*39.9
Lens Thickness	2 mm
Overall Length (Lens-Tip)	167 mm
Overall Width (Hinge-Hinge)	129.3 mm
Packaging	10 pair/box
Packed	200 pairs/case

MATERIALS

Lens	Polycarbonate
Nose Bridge	TPR
Temple	Polycarbonate
Temple	TPEE
Screw	304 Steel
Nosepiece	TPR

PERFORMANCE DATA

ANSI Compliance	ANSI Z87.1-2020 ANSI Z87+
------------------------	------------------------------




Product Description

The **X6** combines sleek design with versatile functionality for all-day comfort and performance. GripFit™ temples adapt to moisture for a secure grip, while the ergonomic FLXBridge™ nosepiece ensures a comfortable fit for extended wear.

Equipped with ClearGARD™ Hydrophilic Anti-Fog Coating, the **X6** resists abrasion, chemicals, and UV exposure. This technology absorbs moisture to prevent fogging, while the anti-scratch coating enhances durability.


Meeting ANSI Z87.1+ standards, the **X6** features impact-resistant polycarbonate lenses and durable frames, providing optical clarity and 99.9% UVA, UVB, and UVC protection.

The **X6** is the ultimate choice for professionals who want to *see clearly and stay safe*.

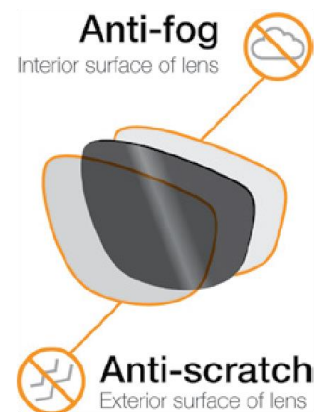

VARIATIONS

PART NO.	FRAME	LENS	COATING
X6B01	Black	Clear	Anti-Fog, Anti-Scratch
X6B04	Black	Indoor/Outdoor	Anti-Fog, Anti-Scratch
X6B13	Black	Neutral Gray	Anti-Fog, Anti-Scratch

 **WARNING:** Risk of Reproductive Harm from Bisphenol A Exposure
For More Information, go to www.P65Warnings.ca.gov