



Fixture: _____

Date: _____ QTY: _____

Client/Project: _____

Airflex C

High Bay

Product Details

Commercial and industrial LED high bay. Suspended mounting. Steel construction with high gloss white finish. 2' and 4' lengths. Occupancy Sensor, Bi-Level Dimming and 10kV Surge protection available options. Dry and damp rated. DLC and cULus listed. 10 Year Warranty.

Specifications

Efficacy: 2': Up to 181 Lm/W | 4': Up to 195 Lm/W

CRI: 83

Color Temperature: 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347/480V

Controls: 0-10V Dimming

Operating Temperature: -20°C to +55°C

Mounting Option

Suspended: V Clips, Aircraft Cable

Accessories

Occupancy Sensor (on/off), Bi Level Dimming (100%/10%),
10kV Surge Protection

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Airflex 2 80c	76	181	13,756
Airflex 2 95c	90.5	178	16,122
Airflex 2 110c	105	178	18,690
Airflex 2 135c	128	176	22,528

Model	Watts	Lm/W	Delivered Lumens
Airflex 4 80c	74	195	14,551
Airflex 4 110c	105	181	18,909
Airflex 4 135c	128	181	23,206
Airflex 4 160c	154	174	26,830
Airflex 4 190c	183	174	31,861
Airflex 4 240c	234	166	39,110
Airflex 4 320c	315	164	51,473
Airflex 4 400c	394	163	64,090
Airflex 4 480c	473	162	76,705
Airflex 4 600c	600	162	97,200

Airflex 4 600c - not DLC Listed




Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qlp.

Specifications subject to change without notice.


Airflex C

Dimensions

Airflex 2'

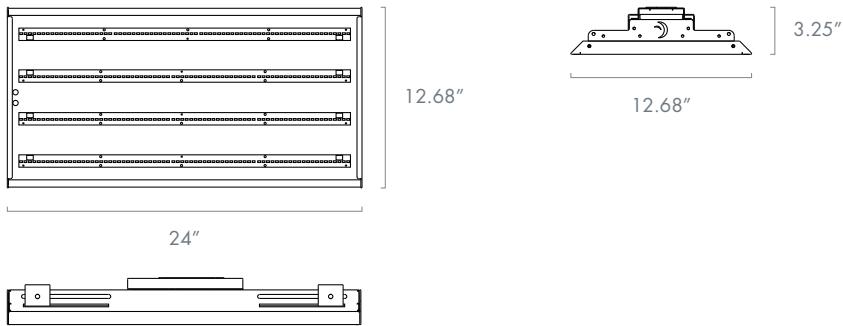




Airflex 4'

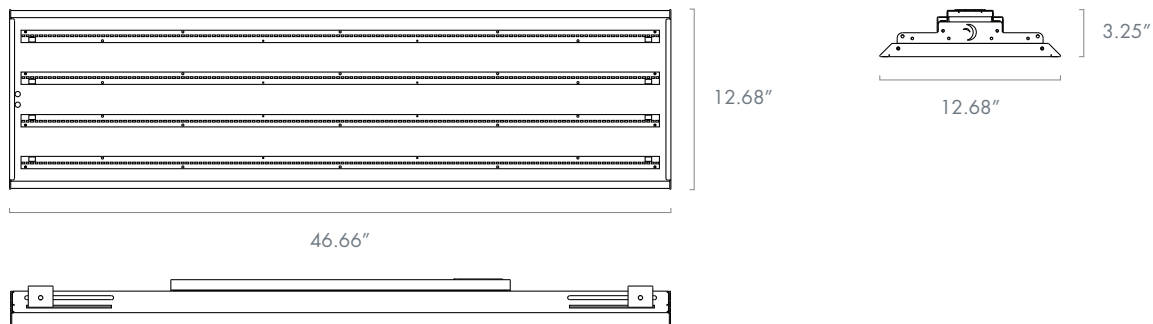



Airflex C 4, 320W, 400W, 480W

Dimensions

Airflex 4' - 320W

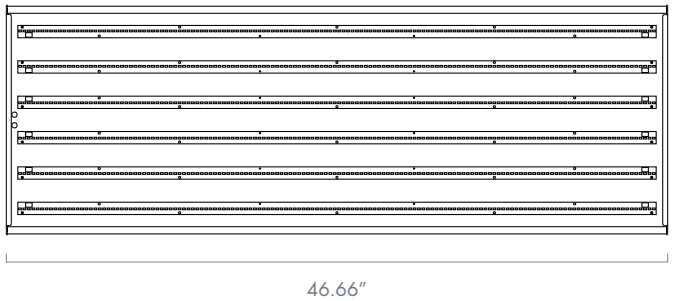

Airflex 4' - 400W, 480W

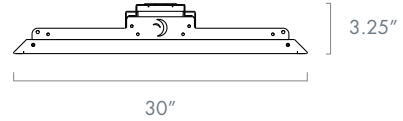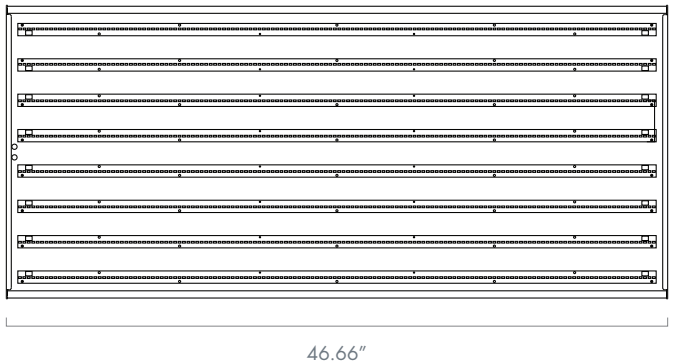

Airflex C

Ordering Guide

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Airflex 2	80c, 95c, 110c, 135c	4K 4000K	U 120/277V	NL No Lens Standard	WH White	V V Clips
Airflex 4	80c, 110c, 135c, 160c, 240c, 190c, 320c, 400c, 480c, 600c	5K 5000K	H 347/480V	FR Frosted CL Clear		AC Aircraft Cable
					WH	
WIRING		ACCESSORIES		PLUG OPTION		
BFC Black Flexible Cord WFC White Flexible Cord	N None OCC Occupancy Sensor (on/off) BLD Bi Level Dimming (100%/10%) 10kV 10kV Surge Protection			N None *See Plug Options		

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug	6-20P - 250V AC 20A Plug	24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L5-15P - 125V 15A Locking Plug	L6-20P - 250V 20A Locking Plug	L24-20P - 347V 20A Locking Plug
5-20P - 125V AC 20A T-Slot Plug	7-15P - 277V 15A 3W/2P NEMA 7-15 Plug	24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15
L5-20P - 125V 20A Locking Plug	L7-15P - 277V 15A Locking Plug	
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15	7-20P - 277V AC 20A Plug	
L6-15P - 250V 15A Locking Plug	L7-20P - 277V 20A Locking Plug	