


# PL V 6W DIR TITANIUM LED SERIES



**6W REPLACES**





**13-18W CFL**

60% Energy Savings

**PRO**



- ⌚ **Easy to install - Plug & Play Direct**
- ⌚ **Ballast smart control technology**
- ⌚ **Exceptional efficacy 103 LPW**
- ⌚ **Dimmable on 0-10V circuits**
- ⌚ **Compatible with most electronic ballasts**
- ⌚ **Available in 2700K, 3000K, 3500K & 4000K CCT**



## PL PRODUCT FEATURES

### High Performance - Ballast Smart Control


The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W and 18W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	550	4.8W
18W	620	6W

### Innovative Round Design - Patent Pending



GREEN CREATIVE PL V LED Lamp



Other PL V LED Lamp

The PL V lamp features a patent pending fully round design. Compared to other square shaped PL vertical lamps, the GREEN CREATIVE PL V improves the overall light output and aesthetics of the fixture.

# PL V 6W DIR TITANIUM LED SERIES

## APPLICATIONS

### Retail




### Hospitality



### Office



**Base:** G24q & GX24q (4-pin CFL)  
**Voltage:** Ballast compatible 120-277V  
**Dimmable:** Yes  
**PF:** 0.9  
**Lifetime (L70):** 50,000 hrs  
**Weight:** 0.14lb / 64g

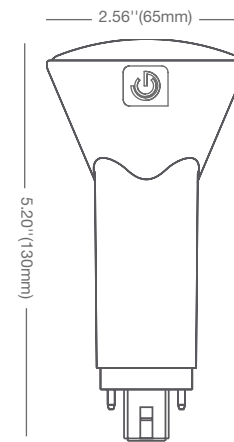

Ref.#: DS198-PLY-6W-DIR-291216

## SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<b>6PLV/827/DIR</b>	<b>28370</b>	<b>6</b>	<b>Soft White 2700K</b>	<b>82</b>	<b>570</b>	<b>95</b>	<b>120°</b>
<b>6PLV/830/DIR</b>	28371	6	Warm White 3000K	82	600	100	120°
<b>6PLV/835/DIR</b>	28372	6	Neutral White 3500K	82	600	100	120°
<b>6PLV/840/DIR</b>	28373	6	Cool White 4000K	82	620	103	120°

## BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens
<b>13W</b>	<b>4.8</b>	<b>6.5</b>	<b>480</b>	<b>500</b>	<b>500</b>	<b>550</b>
<b>18W</b>	<b>6</b>	<b>8</b>	<b>570</b>	<b>600</b>	<b>600</b>	<b>620</b>

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

\* Suitable for damp locations. Not for use where directly exposed to weather or water  
 \*\* Not intended for use in enclosed fixtures

\*\*\* Full installation guide and more details available on website