

COMPLETELY
RE-ENGINEERED

**HV
TC**

**COMPARED TO PREVIOUS
GENERATION 115V HVTC**

- 2x airflow velocity at bulkhead
- 38% lower motor amps
- 68% quieter
- 27% lighter



Handle for Easy Maneuverability & Multiple Pivot Positioning

Optional Integrated LED Lights


5"



4-Way Switch Available



Safety Yellow Available

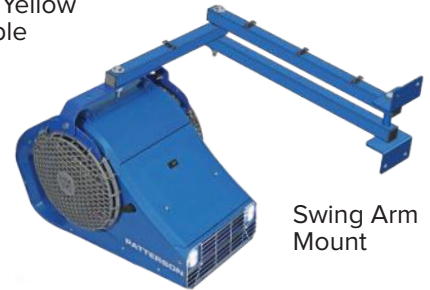

Swing Arm Mount

MODEL	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	UNIT WEIGHT
			W	D	H		
HVTC	3200	1/2	16"	26"	17.5"	120'	42 lbs

FEATURES


- Wheel (Blower):** 9.5" X 11"
- Fan Housing:** High Impact Polypropylene
- Inlet Guards:** .5" Opening
- Outlet Guards:** .5" Opening
- Mounts:** Fixed 90° or Swing Arm
- RPM:** 1075
- Decibels:** 75 @ 3'
- Enclosure:** ODP Standard
- Frame:** 48
- Ambient Temperature:** 104°F
- Duty Cycle:** Continuous
- Warranty:** 2 Years

**OPTIONAL
LED LIGHTS**

- Lumens:** 3100
- Wattage:** 28W
- CCT:** 6500K
- CRI:** 70+
- Operating voltage:** 100-277
- Frequency:** 50/60Hz

MOTOR

VOLTAGE	MOTOR RATED AMPS
115V 1Ø	6.2
208V 1Ø	2.7
277V 1Ø	2.6
460V 3Ø (3/4 HP)	1.5

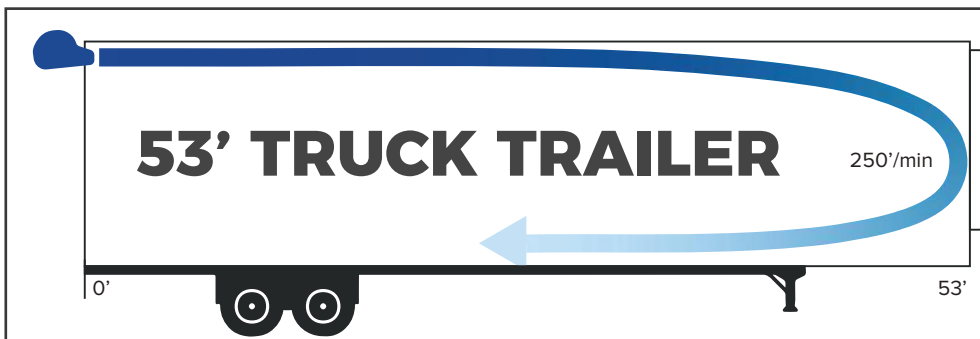

**AIR
FLOW
PATTERN**