

iGLO LED Corn Cob Series - 150W, With Cover

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET




Features

- cULus, DLC certificate.
- E39 lamp base.
- 360° lighting, high CRI.
- IP64 Waterproof Rating
- Internal driver, input voltage AC100-277V.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide.
- Easy Installation.
- Fits many different fixtures to replace traditional lamps.



Applications

Warehouse, Garages, Factory Lighting,
Street lighting, Homes, Offices, Hotels,
Hospitals, Schools, Gardens, etc.


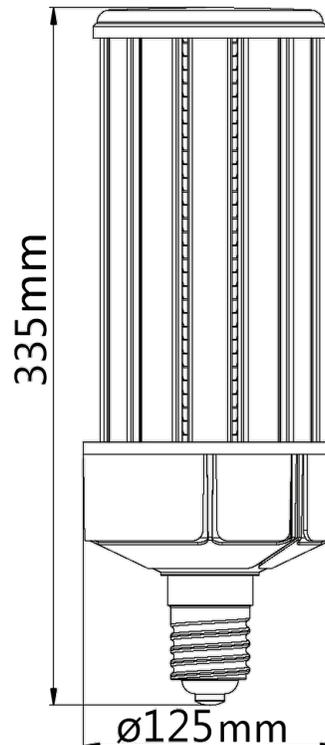


PRODUCT SPECIFICATIONS

iGLO LED Corn Cob Series:	GL150WCCE39WCSNC5000KUDX4.0 (E39) GL150WCCE39WCSNC5700KUDX4.0 (E39)
Wattage:	150W
Lumens:	17592 - 17946 LM
CCT:	5000K/5700K
Input Voltage:	100-277VAC, 50/60Hz
Power Factor:	≥0.90
Efficacy:	119-121 lm/W
Equivalent:	(E39 Base): 400W MHL/HPS/HID
CRI:	>80
THD:	≤15%
Dimmable:	No
Dimensions:	Φ125*335 mm
Beam Angle:	360°
Base:	E39
Operating Temperature:	-20°C to 45°C
Housing	PC+AL
Housing Color:	White+Grey
Cover/Lens Type:	Clear
Waterproof Rating:	IP64
Certificates:	cULus, DLC
Warranty:	5 Years

Size	Qty / Carton	Net Weight/Carton	Gross Weight/Carton
465*315*385mm	6 pcs	7.4 kg	10.2 kg

PHOTOMETRIC DATA

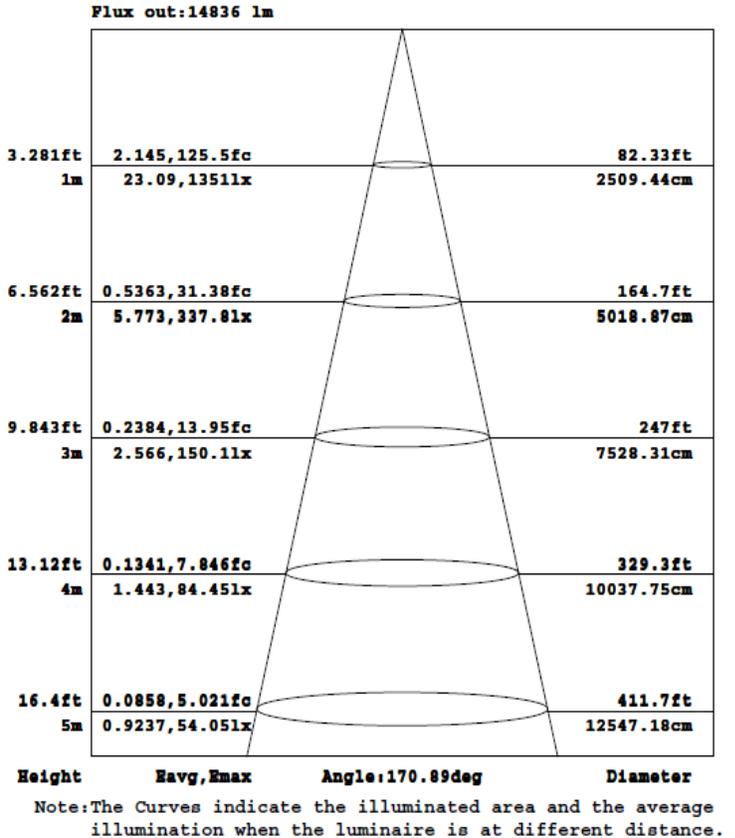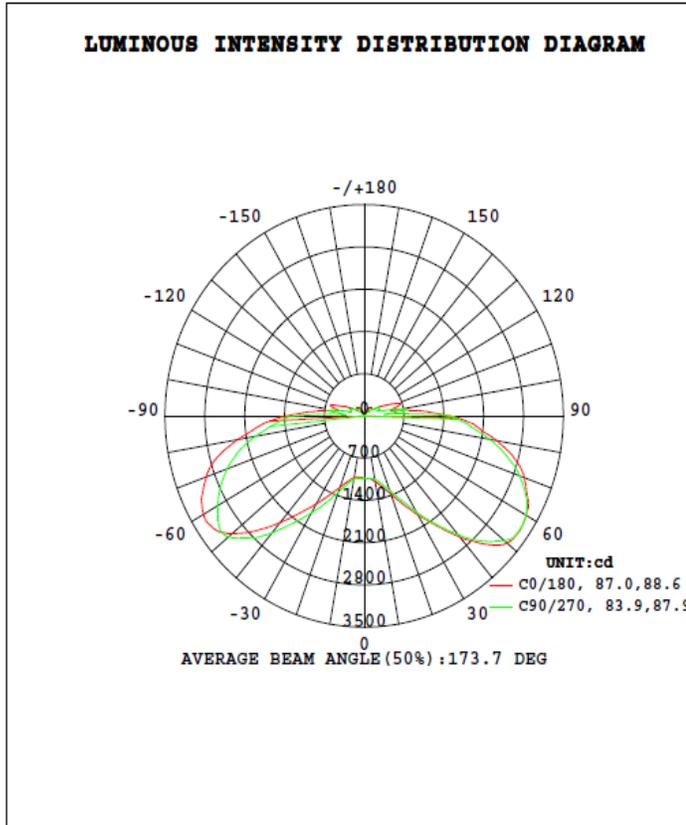

Notice:

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- Make sure to remove or bypass the ballast in the fixtures before install the lamps.
- Suitable for damp locations. Do not use with dimmers.
- Suitable for use in enclosed luminaires, min. lam compartment dimensions: 470*270*270MM.
- No-professionals, must not install and disassemble the lamps.

