

- > 3 Position Switch-High, Off, Low
- > Plug-in Power Supply
- > Soft White 3000k CCT
- > Lasts 32 years* or 35,000 Hours Continuous Use
- > Maintenance Free No Bulb Replacements
- > 5 Year Limited Warranty

18" Under Cabinet

500lms | 120VAC | Model 54195112 | Part UC-18-8-830-SV



SPECIFICATIONS

Model 54195112

Part UC-18-8-830-SV

Description 18" Under Cabinet Light-Non-Dimmable

Input Voltage (VAC) 120 Wattage 8

Dimmability Non-Dimmable
Average Rated Life¹ 35,000 hours

Typical Lumens² 500
CCT³ 3000k
Location Rating UL Damp

CRI⁴ 80 **Beam Angle** 100

Operating Temperature Min -4°F (-20° C),

Max 113°F (45° C)

 Power Factor
 >0.9

 R9
 11

 DUV
 -0.0015

CBCP 186
Operating Frequency (Hz) 60


- 1 Hours lifetime with 70% lumen maintenance
- 2 Thermally stable typical lumens (±10%)
- 3 Thermally stable CCT (±10%)
- 4 Color rendering index/Ra









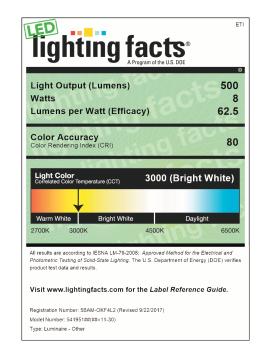





18" Under Cabinet

500lms | 120VAC | Model 54195112 | Part UC-18-8-830-SV

SHIPPING INFORMATION

Model 54195112

 Part
 UC-18-8-830-SV

 UPC
 836607009340

 Product Dimensions (L x W x H in.)
 18 x 0.92 x 1.72

 Product Dimensions (L x W x H cm.)
 457 x 23 x 44

Product Weight (lbs.)

Inner Carton Quantity

N/A

Inner Carton Bar Code

N/A

Inner Carton Dimensions (L x W x H in.)

N/A

Inner Carton Dimensions (L x W x H cm.)

N/A

Inner Carton Weight (lbs)

N/A

Master Carton Quantity

5

Master Carton Weight (lbs) 4
Pallet Quantity 840

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

TO ORDER: www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754 ETi Solid State Lighting, Inc. 720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256