

GL902

Nylon + Acrylic | HPT

ANSI/ISEA 105-2016 – CUT A2 | ABRASION 3 | PUNCTURE 2
 EN388: 2016 – 3231X
 EN511: 2006 – X2X

HPT full dipped coating // 15 gauge nylon outer liner // 7 gauge acrylic inner liner // Contact cold protection // Water-resistant // Coating remains soft in extreme low temperatures // Treated with Sanitized Actifresh® to control bacteria and odor

GL902 S – 2XL

Suggested Applications

Refrigerated Area // Utilities // Food Processing // Commercial Fishing // Construction // Outdoor Activities

Glove Breakdown

Type: Insulated Dipped Glove
Material: HPT
Outer Liner: 15 Gauge Nylon
Inner Liner: 7 Gauge Acrylic
Cuff: Nylon + Acrylic + Latex Elastic

This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Testing Performance

EN388: 2016 – 3231X


Abrasion	1	2	3	4					
Circular Blade Cut	1	2	3	4	5	X			
Tear	1	2	3	4					
Puncture	1	2	3	4					
Cut TDM-100	A	B	C	D	E	F	X		
Impact Rated	P	F	X						

EN511: 2006 – X2X

Convective Cold	1	2	3	4	X				
Contact Cold	1	2	3	4	X				
Water Penetration	0	1	X						

ANSI/ISEA 105-2016

Cut	1	2	3	4	5	6	7	8	9
Abrasion	1	2	3	4	5	6			
Puncture	1	2	3	4	5				

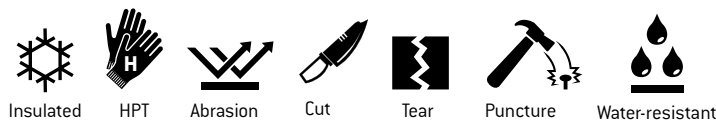

i Product markings may vary. Refer to the product sheet for the most current test report results.

Glove Sizing

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
---------	----------	---------	------------	-------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

Packaging

Pack: 12 pair
Case: 60 pair
Country of Origin: Pakistan