

All LED Exit & Emergency Thermoplastic Combo



Illumination

- Long lasting, efficient ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish.
- EZ snap-out Chevron directional indicators.

Sample Ordering Information

HL03143RWRC

Red Letters

White Housing

Remote Capable

Project:	
Catalog#:	
Approved by:	

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.


Electrical Data

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
HL0314 (Red Letters)	3.7	3.8	0.040	0.020
HL0314 (Green Letters) HL0314 (Red Letters) - RC	3.0	3.2	0.030	0.014
HL0314 (Red Letters) - RC	3.4	3.6	0.033	0.015

Warranty & Listings

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).
- Certified to CEC under Title 20 Regulations.

Dimensions

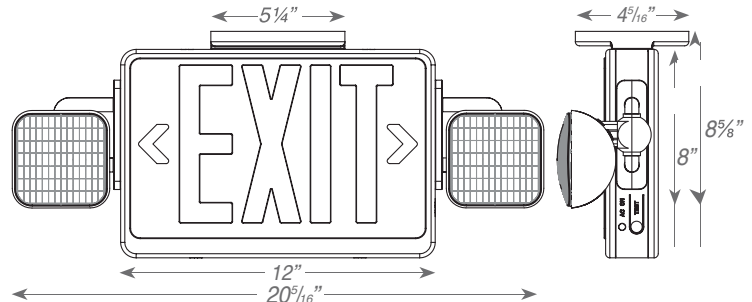

Ordering Information

Model	Number of Faces	Letter Color	Housing Color	Options
HL0314	3: Universal	R: Red G: Green	W: White	Blank: None *RC: Remote Capable

*Compatible only with Howard HLRHLED remote heads ([click here](#)).